

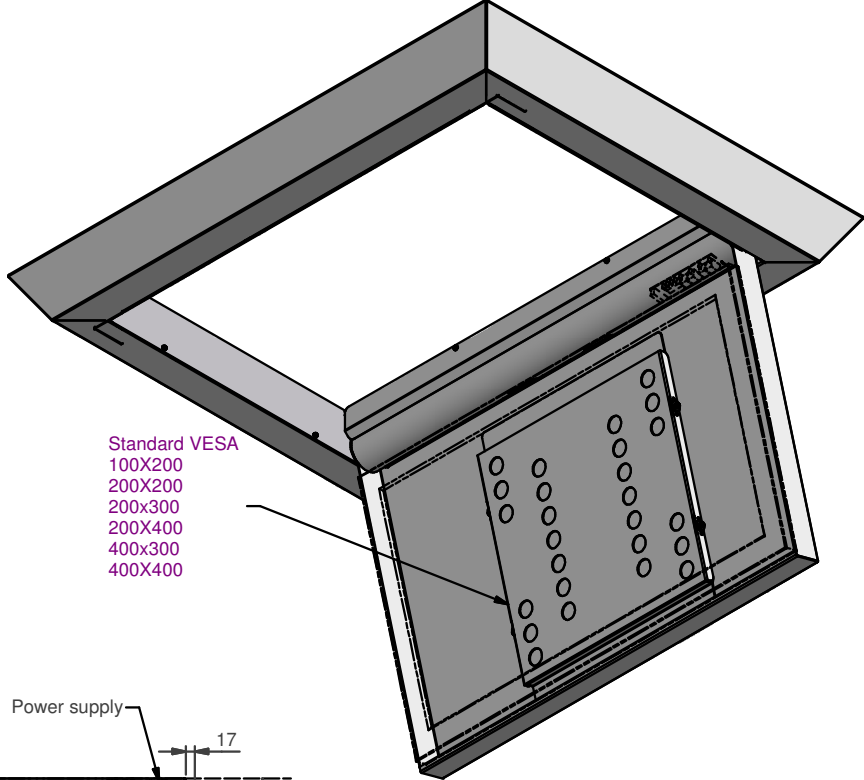


Take into account a clearance of 200 mm for service and maintenance

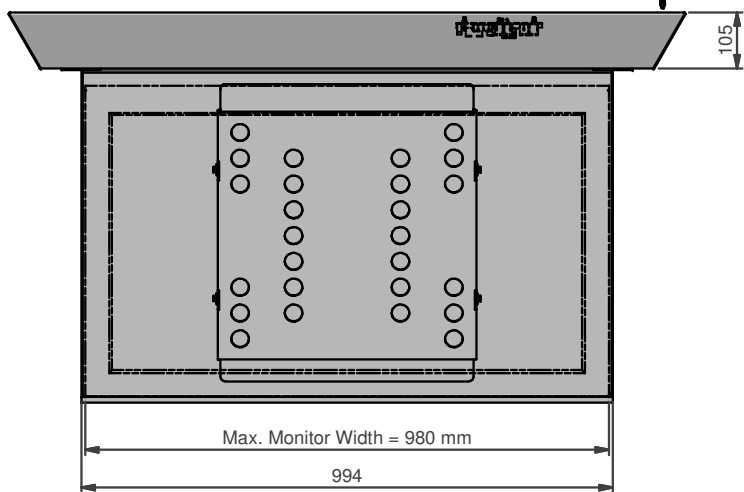

Standard VESA  
 100X200  
 200X200  
 200X300  
 200X400  
 400X300  
 400X400

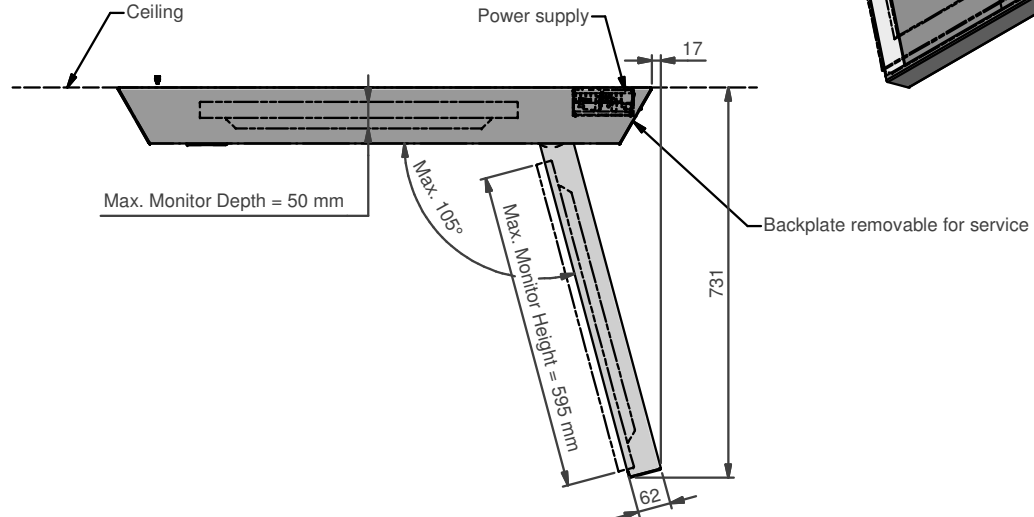

NOTE: All dimensions are ±..., in mm and subject to change

Suitable for screens up to 32 inch  
 Max. load: 20 Kg  
 Power supply: 100-240VAC/5A 50/60 Hz

Dimensions are indications, not to be used for any preparations. No rights can be derived from the above dimensions.

© COPYRIGHT AUDIPACK  
 This print and the information shown  
 thereon, is the property of  
 AUDIPACK.  
 It may not be delivered to others nor  
 reproduced for general circulation  
 without the written consent of the  
 AUDIPACK engineering department.



**AUDIPACK**  
 Industriestraat 2-4  
 2751 GT Moerkapelle  
 the Netherlands  
 Tel: +31(0)795931671  
 Fax: +31(0)795933115  
 www.audipack.com

PRESENTATION  
 FFCL-3032S

FLAT PANEL FOLD DOWN LIFT  
 SURFACE MOUNTED